Name of Work: Improvments to roads and drains near Byraveshwara circle Surrounding in Royal enclave & Meenakshi layout bagalagunte in Ward -14,

(4)

ಸಹಾಯಕ ಕಾರ್ಯ ಪಾಲಕ ಅಭಿಯಂತರರು
ಟಿ. ದಾಸರಹಳ್ಳಿ ಉಪ ವಿಭಾಗ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ಬಾಗಲಗುಂಟೆ, ಬೆಂಗಳೂರು - 560 073

Rate Analysis for 1.0Sqm of R.C.C Precast of 0.10m Thick by Using I/c P&M/ID SR 2012-13

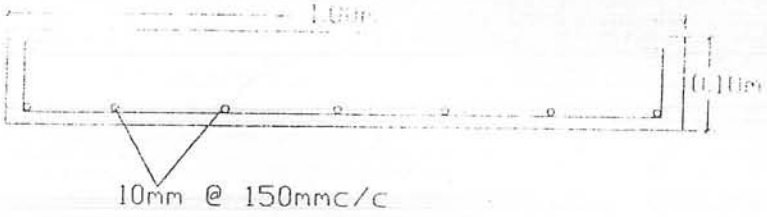

1).Steel Qty= 1x7x1.10=7.70m
= 1x7x0.90=6.30m
Tota=14.00m
=14.00x0.62kgs/m =8.68kgs

Cost of Steel including Fabrications
(P-19/I-4.46,SR 2012-13)=(Rs 71.89/Kgs)=8.68x71.89=Rs.624.00

2).Cost of Concrete Qty= 1.00x1.00x0.10=0.10Cum
(P-13/I-4.11,SR 2012-13)=(Rs.5142.06/Cum)=0.10x5142.06=Rs514.20

3).Cost of Centring work Qty=Slab bottom= 1.10x1.10=1.21Sqm
Alround Slab= 4.00x0.15=0.60Sqm

Total=1.81Sqm

(P-16/I-4.28,SR 2012-13 =1.81x254.40=Rs.460.46

Total=Rs.1598.66

The Cost of precast Slab is Say Rs.1600/Sqm.

AE
Wno.14

AE
Wno.15

Assist. Executive Engineer
T.Dasarahalli Sub Division
BBMP Bangalore.

Executive Engineer
Dasarahalli Division
BBMP Bangalore.

Approved

(2)

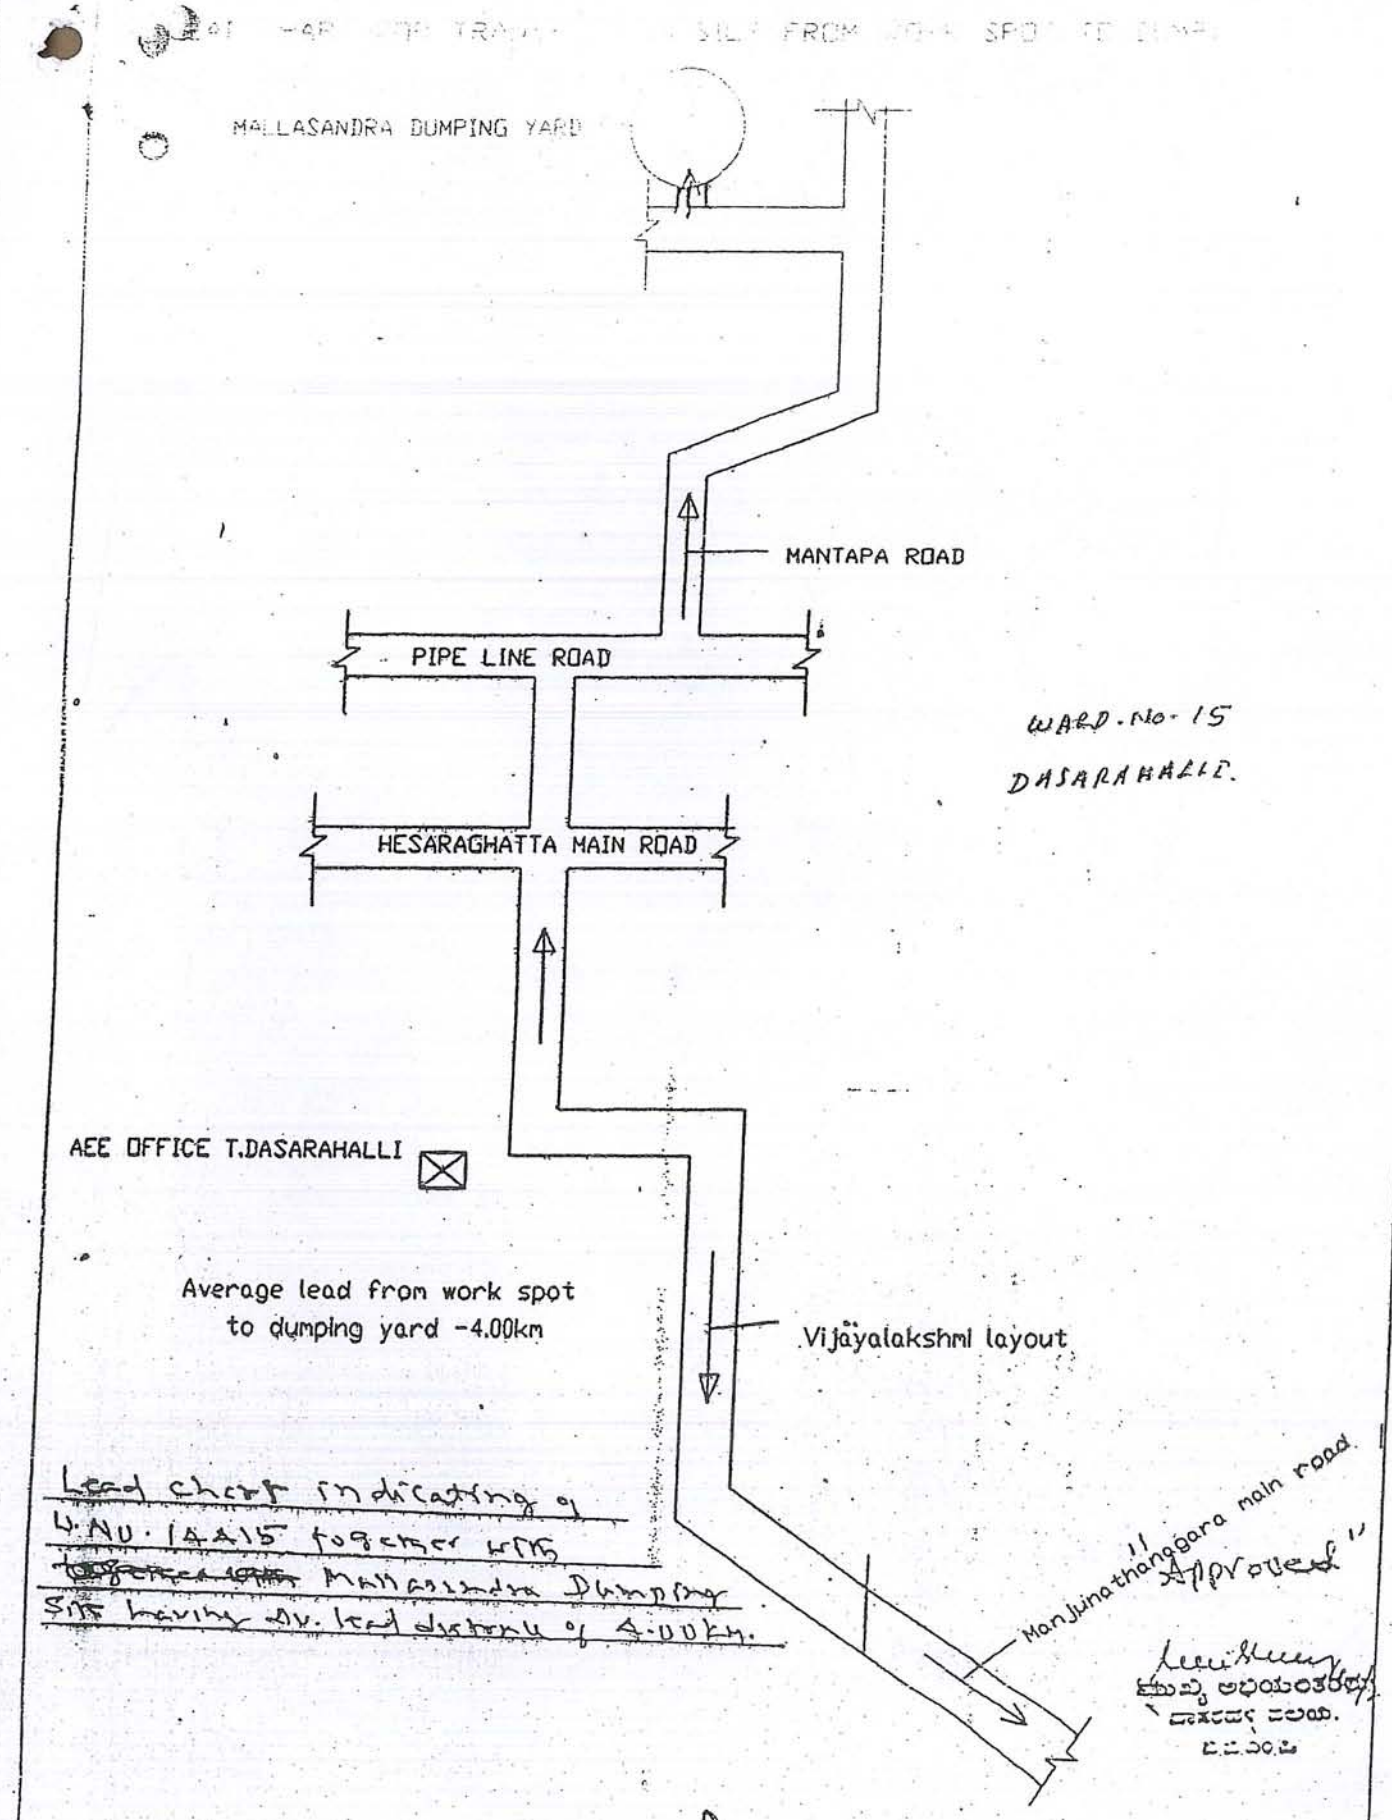

Lead chart indicating of
W.No. 14 & 15 together with
~~[illegible]~~ Mallasandra Dumping
Site having Av. lead distance of 4.00Km.

"Approved"

Assist. Engineer
Ward no.14 & 15

Assist. Executive Engineer
T.Dasarahalli Sub Division
BBMP

Executive Engineer
Dasarahalli Divison-1
BBMP

(1)

BRUHATH BANGALORE MAHANAGAR PALIKE

Dasarahalli Zone - T.Dasarahalli Sub-division

Ward No. 14 - Bagalakunte

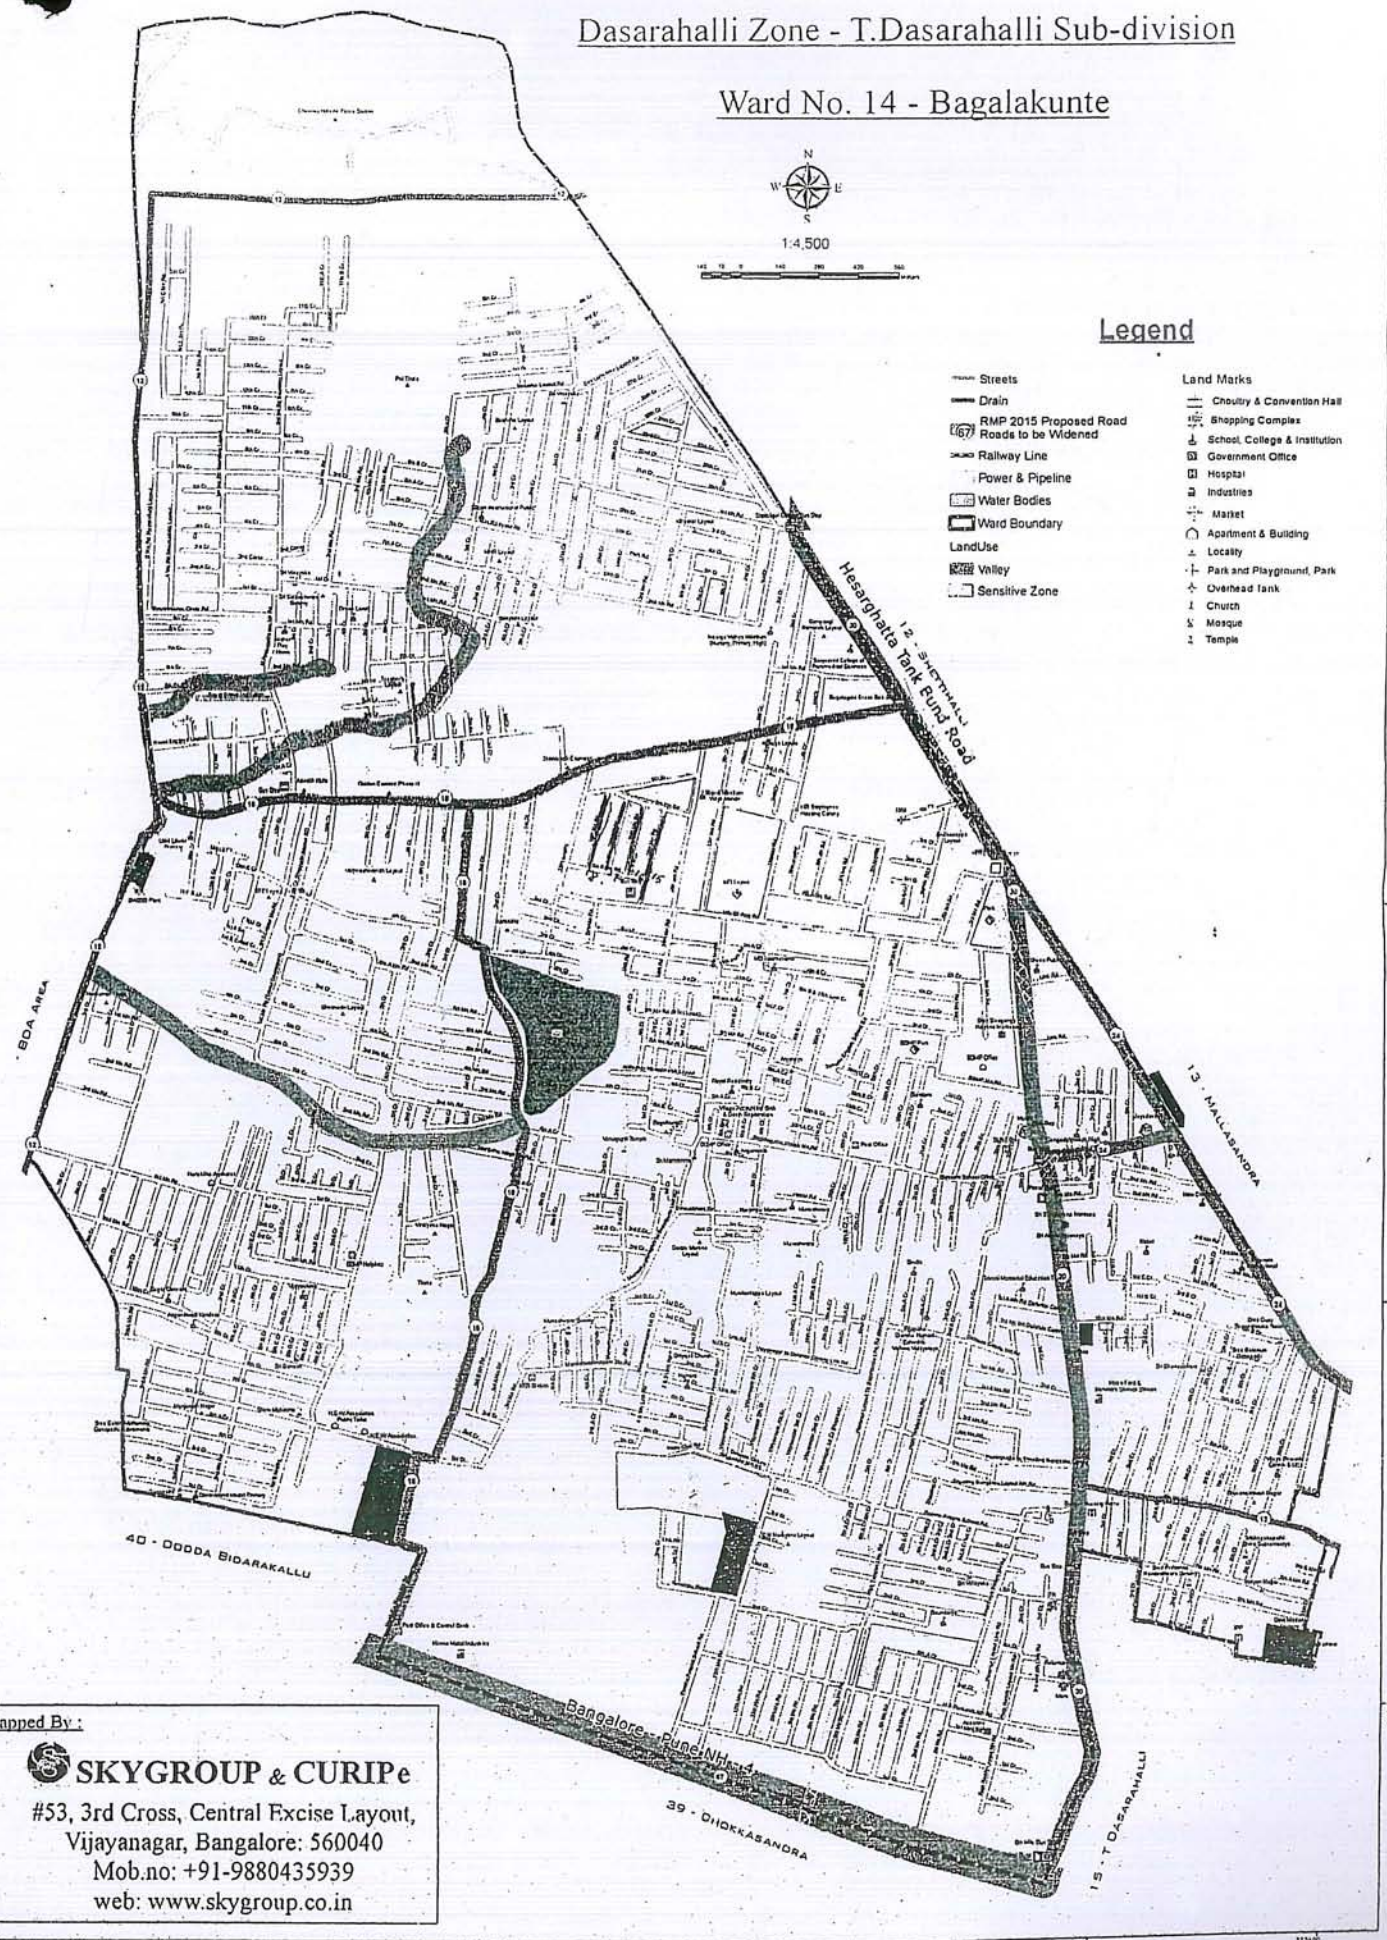

Mapped By :

SKYGROUP & CURIPe

#53, 3rd Cross, Central Excise Layout,
Vijayanagar, Bangalore: 560040
Mob.no: +91-9880435939
web: www.skygroup.co.in